
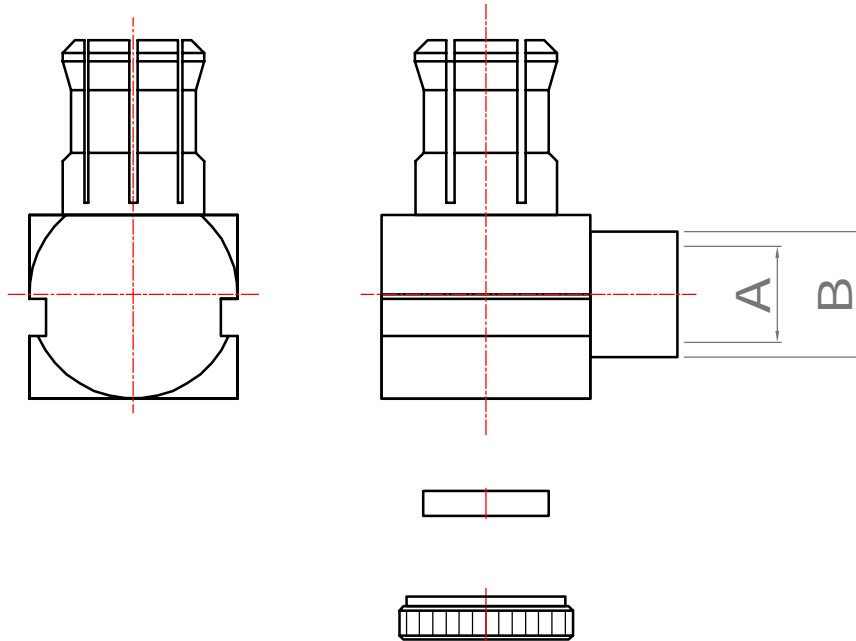


## Revisions

Outline Drawing

ISS	Symbol	Description	Date
B		CHE for New Drawing Frame & New PN System	2006/07/10



## Electrical :

Impedance : 50 ohm

Frequency Range : 0~6 GHz .

Voltage Rating :  $\geq 335$  V rms. (depending on cable)

Insulator Resistance :  $\geq 1$  G $\Omega$

Dielectric Withstanding Voltage : 750 V rms.

Contact Resistance :Center Contact  $\leq 5$  m $\Omega$ .

Outer Contact  $\leq 2.5$  m $\Omega$ .

Cable Type	Dimensions	
	A	B
RG402	3.67	4.2
RG405	2.3	3.0

## Mechanical :

Mating : Sanp-on Coupling

Engagement Force :  $\leq 3.4$  lbs

Disengagement Force : 1.4 lbs ~ 3.4 lbs

## Environmental :

Corrosion (Salt Spray) : MIL-STD-202, Method 101, Cond. B

Thermal Shock : MIL-STD-202, Method 107, Cond. F

Mechanical : MIL-STD-202, Method 213, Cond. B

Vibration : MIL-STD-202, Method 204, Cond. C

## Notes :

1. The overall contour may be slightly changed per terminating with different cable and we reserve right to change it without notice.
2. Any changes for interface dimensions are strictly prohibited.
3. The Material and plating are in various options per customer's request.
4. A complete information for connectors is available upon request.

Scale	Abbr.	Date	Rev.
NTS	ST	2017/03/16	B

Tolerances :	
.X $\pm 0.2$	All Dimensions in mm (Unless Otherwise Specified)
.XX $\pm 0.1$	
.XXX $\pm 0.05$	

Drawn	Checked	Approved
Mark	Ryan	G. Sun
2017/03/16	2017/03/16	2017/03/16

Proprietary Note  
This document contains information proprietary to S-Conn, which is either copyrighted, or patent applied for, and / or protected by trade secret laws.  
This document or parts thereof, may not be used, disclosed or reproduced in any form by any method, or for any purpose, without the written permission of S-Conn, Taiwan.

Customer P/N: Nil

DWG.NO.

MX121

TITLE

MCX R/A Plug, Solder Type



**S-Conn Enterprise Co., Ltd.**

